


## 8. Specifications

### X-Top active



Model	Top XT-33 active	Top XT-4 active	Top XT-5 active
Power Rating	2x 1.000 W / 8 ohms	2x 1.000 W / 8 ohms	2x 1.000 W / 8 ohms
Components	12"/1" CD fully neodymium	12"/1,4" CD fully neodymium	15"/1,4" CD fully neodymium
Principle	2 way, vented	2 way, vented	2 way, vented
SPL max.	130 dB	131 dB	132 dB
Frequency response	55 Hz – 20 kHz	55 Hz – 20 kHz	45 Hz – 20 kHz
Dispersion H x V (-6 dB)	90° x 60°	80° x 50°	80° x 50°
Dimensions (W x H x D)	38 x 59 x 39 cm	38 x 59 x 39 cm	46 x 70 x 48 cm
Weight	19 kg	21 kg	27 kg
Colour	black, textured paint	black, textured paint	black, textured paint
Protective grille	metal grille with acoustic foam	metal grille with acoustic foam	metal grille with acoustic foam
Handles	2 edge handles	2 edge handles	1 deep-set handle, 2 edge handles
Monitor angle	55°	55°	45°
Speaker stand pole	integral, ø 36 mm	integral, ø 36 mm	integral, ø 36 mm
Ring stud for safety	integral	integral	integral
2x M8 mounting devices	for U-bracket VXT-3	for U-bracket VXT-3	for U-bracket VXT-5
<b>Connectors</b>			
Inputs	2x XLR/jacks, multifunctional input jacks	2x XLR/jacks, multifunctional input jacks	2x XLR/jacks, multifunctional input jacks
Outputs	2x XLR link jacks	2x XLR link jacks	2x XLR link jacks
	1x NL4 Neutrik Speakon 8Ω for external LS	1x NL4 Neutrik Speakon 8Ω for external LS	1x NL4 Neutrik Speakon 8Ω for external LS
	2x Powercon mains jacks in and link	2x Powercon mains jacks in and link	2x Powercon mains jacks in and link
	2x Network jacks RS-485 in and link	2x Network jacks RS-485 in and link	2x Network jacks RS-485 in and link

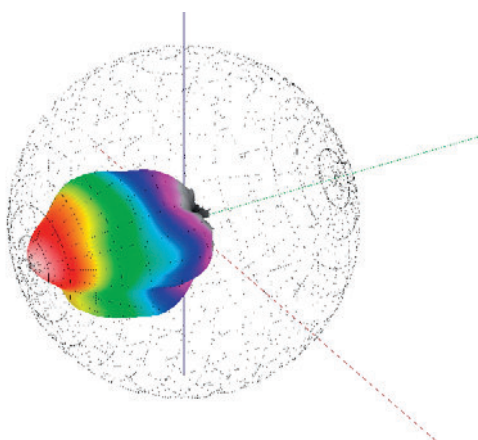

Datas for the roomsimulation programmes

**EASE** and **ULYSSES** download under:

[www.fohn.com / Downloads](http://www.fohn.com / Downloads)

